

???????? - ?????????

????????



????????????????????????????????????

Rating: Not Rated Yet
Price:
Variant price modifier:

Base price with tax:
Price with discount:
Salesprice with discount:
Sales price:
Sales price without tax:
Discount:
Tax amount:

[Ask a question about this product](#)

Manufacturer: [????????](#)

Description



[??8????????????????](#)

????

??-??“?”“??

????????????????????????????“?”“??“PLUS”“???

????????????“????”“??

????????20?150mm????????????????????

AUTOSAT??

????????4?AUTOSAT

????

????



以太网通讯
用于 AUTOSAT 远程程
序和维护的通讯用以
以太网连接



设备识别码
同一工厂内所用的
不同 AUTOSAT 之间
的数字识别系统



防尘传感器
保护传感器不受尘土
影响的标准设备



电池
创新的 48V 锂电池。
轻便且运行良好



起升情况
集成了使手指免于被挤
伤的安全技术
起升（标准上升）
45mm
载重量 1.50T



遥控器
多功能
多种语言
可用于温度低至-30 度
/-22°F 的环境




AUTOSAT




橡胶安全缓冲器
符合适用的安全规定



紧急情况按钮
符合适用的安全规定



闪烁型 LED
识别机器位于通道内状态的简
易方式
机器处于自动模式的信号显示



前置光纤传感器
专利技术、可靠、安全、
独特



机械指令
AUTOSAT 符合该指令中
所有与生产和装配相关
的要求和标准



运输包装
利用熏制过的木箱进行
安全运输



AUTOSERVICE
用于从巷道维护或恢复
机器的手动推车

????

????“????”??

??—???????

????“????”??

??—???????

??)

[illegible]

????????????????????????????????????

~~~~~

????2???????

????????“????”????????????????????????????????????????????????????????

????????240mm



????????350mm

??????????

????????????????????

?????

意大利语/英语/西班牙语/法语/德语/捷克语/波兰语/俄语/中文/韩语/其他语言致函索取

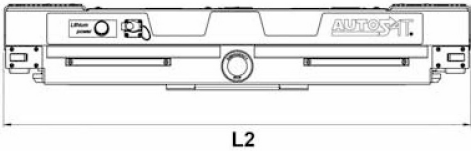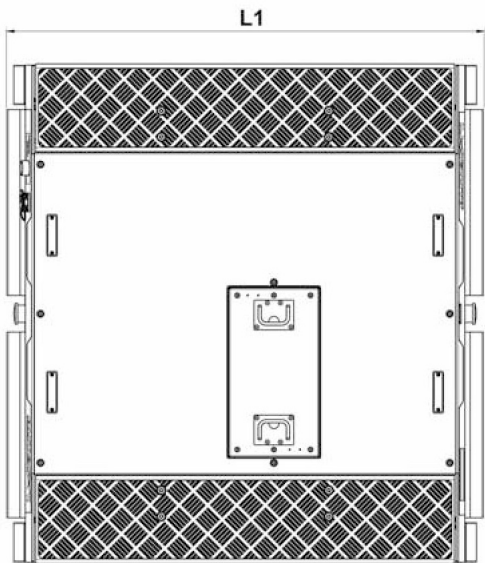

?????[????????????????](#)

[????????????????](#)

?????[????](#)[????](#)[????](#)

Reviews

There are yet no reviews for this product.